

INTEGRITY PRODUCTS


# Insulation Spacer

SILICONE

To avoid the possibility of galvanic corrosion occurring the spacer band and the process pipe should **NOT** come into direct contact with each other.



At a **minimum**, the insulation spacers should be installed at the 2, 4, 8 and 10 o'clock positions. This frequency should increase with the pipe/insulation size to maintain a consistent air gap and ensure the spacer band does not come in direct contact with the process pipe.

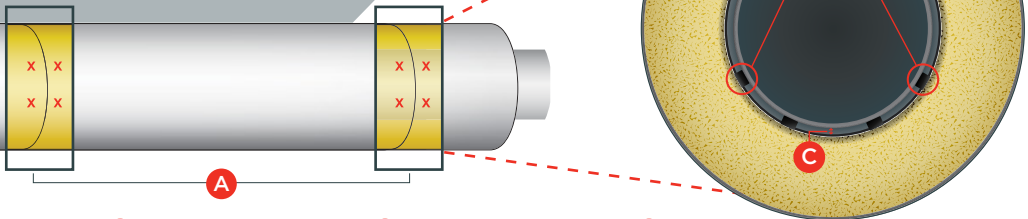

A

recommended install at the end of each piece of insulation

B

install at minimum in the 2, 4, 8 & 10 o'clock positions

C

spacer band and process pipe should not come into direct contact

ONLINE VIDEO <http://lead.me/bauPyZ>

